

Power analyzers and Energy Meters

Power Analyzer

Type WM14-96

CARLO GAVAZZI



- Optional RS422/485 serial port
- Optional dual pulse output
- Alarms (visual only) V_{LN} , A_n

- Class 1 (active energy)
- Class 2 (reactive energy)
- Accuracy ± 0.5 F.S. (current/voltage)
- Power analyzer
- Display of instantaneous variables: 3x3 digit
- Display of energies: 8+1 digit
- System variables and phase measurements: W , W_{dmd} , var , VA , VA_{dmd} , PF , V , A , A_n , A_{dmd} , Hz
- A_{max} , $A_{dmd max}$, $W_{dmd max}$ indication
- Energy measurements: kWh and kvarh
- Hour counter (5+2 DGT)
- TRMS meas. of distorted sine waves (voltages/currents)
- Power supply: 24V, 48V, 115V, 230V, 50-60Hz; 18 to 60VDC
- Protection degree (front): IP65
- Front dimensions: 96x96mm

Product Description

3-phase power analyzer with built-in programming keypad. Particularly recommended for displaying the main electrical variables.

Housing for panel mounting, (front) protection degree IP65 as standard, and optional RS485 serial port or dual pulse output.

How to order

WM14-96 AV5 3 D PG



Type Selection

Range codes	System	Power supply	Options
AV5: 380/660 V_{L-L} /5(6)AAC VL-N: 185 V to 460 V VL-L: 320 V to 800 V AV6: 120/208 V_{L-L} /5(6)AAC VL-N: 45 V to 145 V VL-L: 78 V to 250 V Phase current: 0.03A to 6A Neutral current: 0.09 to 6A	3: 1-2-3-phase, balanced/unbalanced load, with or without neutral	A: 24VAC -15+10%, 50-60Hz B: 48VAC -15+10%, 50-60Hz C: 115VAC -15+10%, 50-60Hz D: 230VAC -15+10%, 50-60Hz 3: 18 to 60VDC (not available in case of SG or PG options)	X: None S: RS485 port SG: RS485+galvanic insulated measuring inputs PG: Dual pulse output + galvanic insulated measuring inputs.

Input specifications

Rated inputs Current "X-S options" Current "SG-PG options" Voltage	3 (non insulated each other) 3 (insulated each other) 4	Reactive power	0.25 to 6A: $\pm(2\% FS + 1DGT)$; 0.03A to 0.25A: $\pm(2\% FS + 5DGT)$
Accuracy (display, RS485) (@25°C $\pm 5^\circ C$, R.H. $\leq 60\%$)	with CT=1 and VT=1 AV5: 1150W-VA-var, FS:230VLN, 400VLL; AV6: 285W-VA-var, FS:57VLN, 100VLL	Active energy "X-S opt." Reactive energy "X-S opt." Active energy "SG-PG opt." Reactive energy "SG-PG opt." Frequency	Class 2 (start up "I": 30mA) Class 3 (start up "I": 30mA) Class 1 (start up "I": 10mA) Class 2 (start up "I": 10mA) $\pm 0.1\% Hz$ (48 to 62Hz)
Current	0.25 to 6A: $\pm(0.5\% FS + 1DGT)$ 0.03A to 0.25A: $\pm 7DGT$	Additional errors	
Neutral current	0.25 to 6A: $\pm(1.5\% FS + 1DGT)$ 0.09A to 0.25A: $\pm 7DGT$	Humidity	$\leq 0.3\% FS$, 60% to 90% RH
Phase-phase voltage	$\pm(1.5\% FS + 1 DGT)$	Temperature drift	$\leq 200ppm/^\circ C$
Phase-neutral voltage	$\pm(0.5\% FS + 1 DGT)$	Sampling rate	1400 samples/s @ 50Hz 1700 samples/s @ 60Hz
Active and Apparent power,	0.25 to 6A: $\pm(1\% FS + 1DGT)$; 0.03A to 0.25A: $\pm(1\% FS + 5DGT)$	Display refresh time	700ms
		Display	
		Type	LED, 14mm
		Read-out for instant. var.	3x3 DGT



Input specifications (cont.)

Display (cont.)		Input impedance	
Read-out for energies	3+3+3 DGT (Max indication: 999 999 99.9)	400/660V _{L-L} (AV5)	1 M Ω \pm 5%
Read-out for hour counter	1+3+3 DGT (Max. indication: 9 999 9.99)	100/208V _{L-L} (AV6)	453 K Ω \pm 5%
Measurements		Current	\leq 0.02 Ω
Coupling type	Current, voltage, power, power factor, frequency, energy, TRMS measurement of distorted waves.	Frequency	48 to 62 Hz
Crest factor	Direct < 3, max 10A peak	Overload protection	1.2 F.S. 2 Un/36A
		Continuous voltage/current	
		For 500ms: voltage/current	

RS485 Serial Port Specifications

RS422/RS485 (on request)		Data (bidirectional)	
Type	Multidrop bidirectional (static and dynamic variables)	Dynamic (reading only)	System, phase variables and energies
Connections	2 or 4 wires, max. distance 1200m, termination directly on the instrument	Static (writing only)	All configuration parameters
Addresses	1 to 255, key-pad selectable	Data format	1 bit di start , 8 data bit, no parity, 1 stop bit
Protocol	MODBUS/JBUS	Baud-rate	9600 bit/s

Dual pulse output

Digital outputs (on request)		Pulse duration	220 ms (ON), \geq 220 ms (OFF)
Pulse outputs		Insulation	According to DIN43864
Number of outputs	2 (one for kWh one for kvarh)		By means of relays,
Number of pulses	From 0.01 to 100 pulses programmable according to the selected CT and VT ratios		4000 V _{RMS} outputs to measuring inputs,
Output type	Relay		4000 V _{RMS} output to supply input.
	min current: 0.05A@250VAC/30VDC		Insulation between the two outputs: 1000V _{RMS}
	max current: 5A@250VAC/30VDC		
	Electrical life: min 2*10 ⁵ cycles		
	Mechanical life: 5*10 ⁶ cycles		

Software functions

Password	Numeric code of max. 3 digits; 2 protection levels of the programming data Password "0", no protection		Page 4: A L1 dmd, A L2 dmd, A L3 dmd Page 5: An, An Alarm Page 6: W L1, W L2, W L3 Page 7: PF L1, PF L2, PF L3 Page 8: var L1, var L2, var L3 Page 9: VA L1, VA L2, VA L3 Page 10: VA Σ , W Σ , var Σ Page 11: VA dmd, W dmd, Hz Page 12: W dmd max Page 13: Wh Page 14: varh Page 15: VL-L Σ , PF Σ , VLN Alarm Page 16: A max Page 17: A dmd max Page 18: hours
1st level			
2nd level	Password from 1 to 999, all data are protected		
System selection	3-phase with/without n, unbal. 3-phase balanced 3-phase ARON, unbalanced 2-phase Single phase		
Transformer ratio			
CT	1 to 999		
VT	1.0 to 99.9		
Filter			
Operating range	0 to 99.9% of the input electrical scale		
Filtering coefficient	1 to 16		
Filter action	Measurements, alarms, serial out. (fundamental var: V, A, W and their derived ones).	Alarms	Programmable, for the VL Σ and An (neutral current). Note: the alarm is only visual, by means of LED on the front of the instrument.
Displaying			
3-phase system with neutral	Up to 3 variables per page Page 1: V L1, V L2, V L3 Page 2: V L12, V L23, V L31 Page 3: A L1, A L2, A L3	Reset	Independent alarm (VL Σ , An) max: A dmd, W dmd all energies (Wh, varh)

Power Supply Specifications

Auxiliary power supply	230VAC -15 +10%, 50-60Hz 115VAC -15 +10%, 50-60Hz 48VAC -15 +10%, 50-60Hz		24VAC -15 +10%, 50-60Hz 18 to 60VDC
		Power consumption	AC: 4.5 VA DC: 4W

General Specifications

Operating temperature	0 to +50°C (32 to 122°F) (RH < 90% non condensing)		measuring inputs and RS485. 4000VAC, 500VDC between power supply and RS485
Storage temperature	-10 to +60°C (14 to 140°F) (RH < 90% non condensing)	Dielectric strength	4000 VAC (for 1 min)
Installation category	Cat. III (IEC 60664, EN60664)	EMC	
Insulation (for 1 minute)	4000VAC, 500VDC between measuring inputs and power supply. 500VAC/DC between	Emissions	EN50084-1 (class A) residential environment, commerce and light industry

General Specifications (cont.)

EMC (cont.) Immunity	EN61000-6-2 (class A) industrial environment.	Housing Dimensions (WxHxD)	96 x 96 x 63 mm
Pulse voltage (1.2/50µs)	EN61000-4-5	Material	ABS self-extinguishing: UL 94 V-0
Safety standards	IEC60664, EN60664	Mounting	Panel
Approvals	CE, UL and CSA	Protection degree	Front: IP65 (standard) Connections: IP20
Connections 5(6) A Max cable cross sect. area	Screw-type 2.5 mm ²	Weight	Approx. 400 g (pack. incl.)


Display pages

Display variables in 3-phase systems (in a 3-phase system with neutral)

No	1 st variable	2 nd variable	3 rd variable	Note
1	V L1	V L2	V L3	
2	V L12	V L23	V L31	Decimal point blinking on the right of the display
3	A L1	A L2	A L3	
4	A L1 dmd	A L2 dmd	A L3 dmd	dmd = demand (integration time selectable from 1 to 30 minutes)
5	An	AL.n		AL.n if neutral current alarm is active
6	W L1	W L2	W L3	Decimal point blinking on the right of the display if generated power
7	PF L1	PF L2	PF L3	
8	var L1	var L2	var L3	Decimal point blinking on the right of the display if generated power
9	VA L1	VA L2	VA L3	
10	VA system	W system	var system	
11	VA dmd (system)	W dmd (system)	Hz (system)	dmd = demand (integration time selectable from 1 to 30 minutes)
12		W dmd MAX		Maximum sys power demand
13	Wh (MSD)	Wh	Wh (LSD)	The total indication is given in max 3 groups of 3 digits.
14	varh (MSD)	varh	varh (LSD)	The total indication is given in max 3 groups of 3 digits.
15	V LL system	AL.U	PF system	AL.U= is activated only if one of VLN is not within the set limits.
16	A MAX			max. current among the three phases
17	A dmd max			max. dmd current among the three phases
18	h			hour counter

MSD: most significant digit

LSD: least significant digit




1) Example of kWh visualization:

This example is showing 15 933 453.7 kWh

2) Example of kvarh visualization:

This example is showing 3 553 944.9 kvarh



Waveform of the signals that can be measured

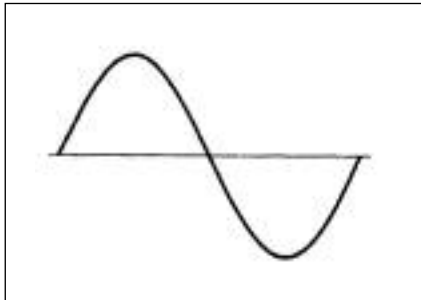


Figure A
Sine wave, undistorted
 Fundamental content 100%
 Harmonic content 0%
 $A_{rms} = 1.1107 | \bar{A} |$

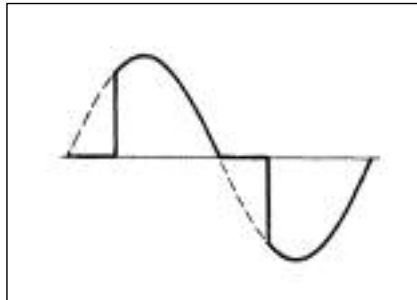


Figure B
Sine wave, indented
 Fundamental content 10...100%
 Harmonic content 0...90%
 Frequency spectrum: 3rd to 16th harmonic
 Additional error: <1% FS


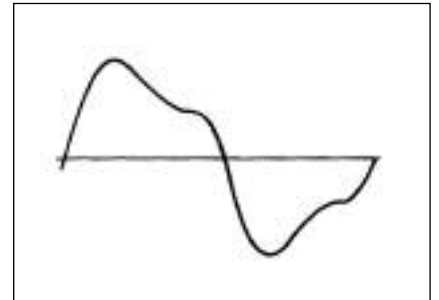



Figure C
Sine wave, distorted
 Fundamental content 70...90%
 Harmonic content 10...30%
 Frequency spectrum: 3rd to 16th harmonic
 Additional error: <0.5% FS

Accuracy

kWh, accuracy (RDG) depending on the current

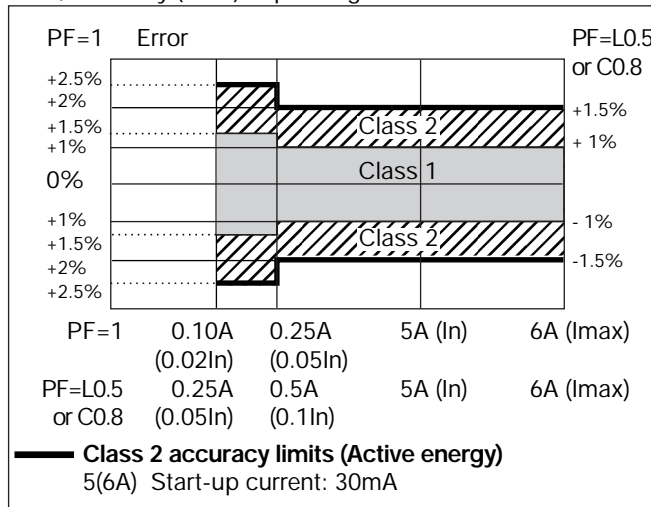

kvarh, accuracy (RDG) depending on the current

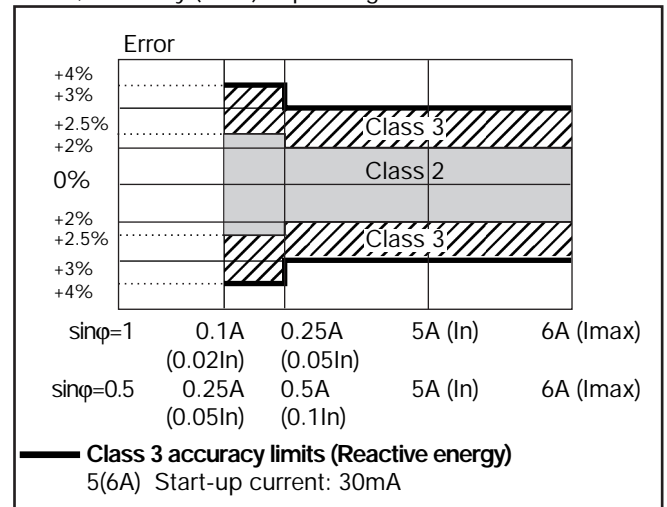

Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{IN} = \sqrt{\frac{1}{n} \cdot \sum_1^n (V_{1N})^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_1^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_1^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$VAR_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

System variables

Equivalent 3-phase voltage

$$V_{\Sigma} = \frac{V_1 + V_2 + V_3}{3} \cdot \sqrt{3}$$

3-phase reactive power

$$VAR_{\Sigma} = (VAR_1 + VAR_2 + VAR_3)$$

3-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

3-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + VAR_{\Sigma}^2}$$

3-phase power factor

$$\cos\phi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}}$$

Neutral current

$$A_n = \bar{A}_{L1} + \bar{A}_{L2} + \bar{A}_{L3}$$

Used calculation formulas (cont.)

$$kWh_i = \int_{t_1}^{t_2} P_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} P_{i,n}$$

$$kVarh_i = \int_{t_1}^{t_2} Q_i(t) dt \cong \Delta t \sum_{n_1}^{n_2} Q_{i,n}$$

Energy metering

Where:

i = considered phase (L1, L2 or L3)

P = active power

Q = reactive power







t_1, t_2 = starting and ending time points of consumption recording

n = time unit

Δt = time interval between two successive power consumptions


n_1, n_2 = starting and ending discrete time points of consumption recording

Wiring diagrams

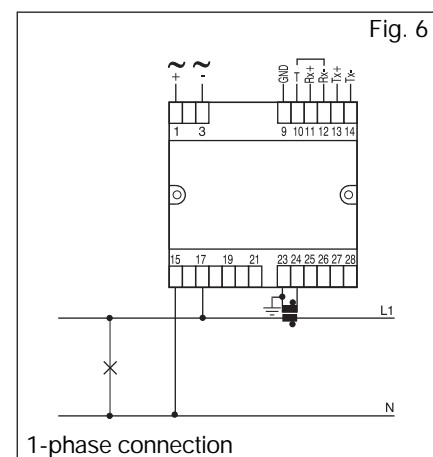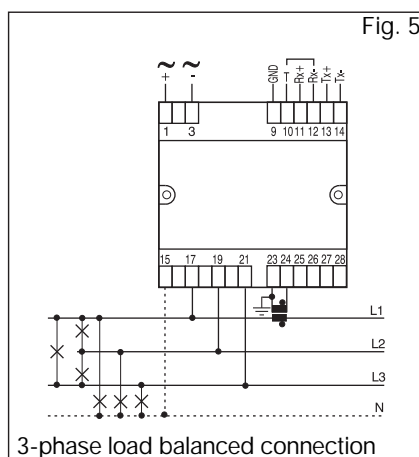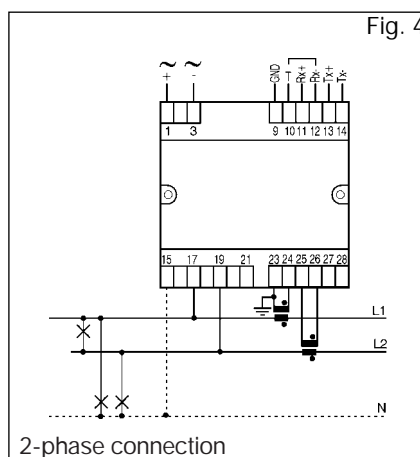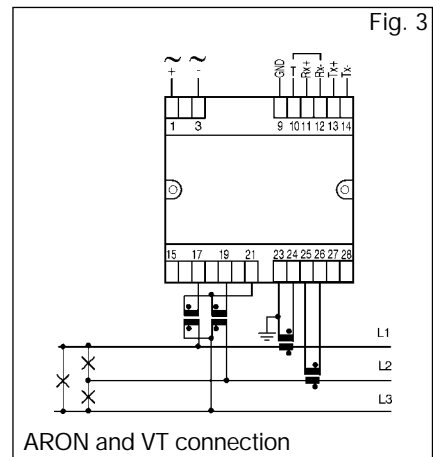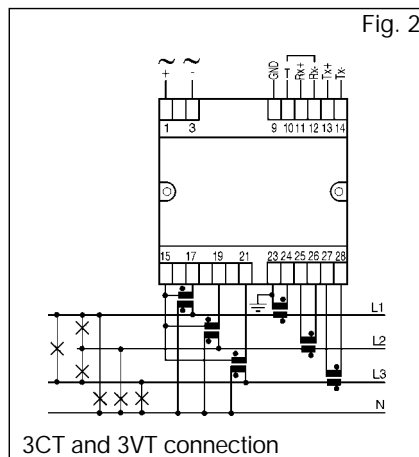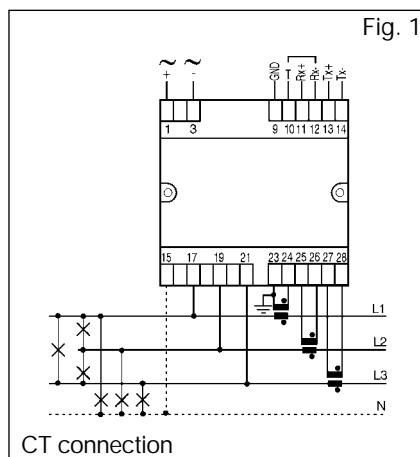


NOTE: the current inputs can be connected to the lines ONLY by means of current transformers. The direct connection is not allowed.


RS485 port connections

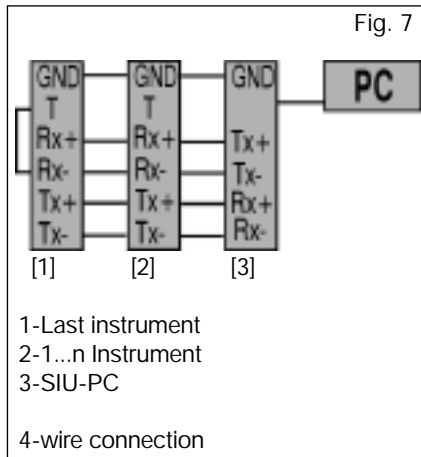

Dual pulse output connections

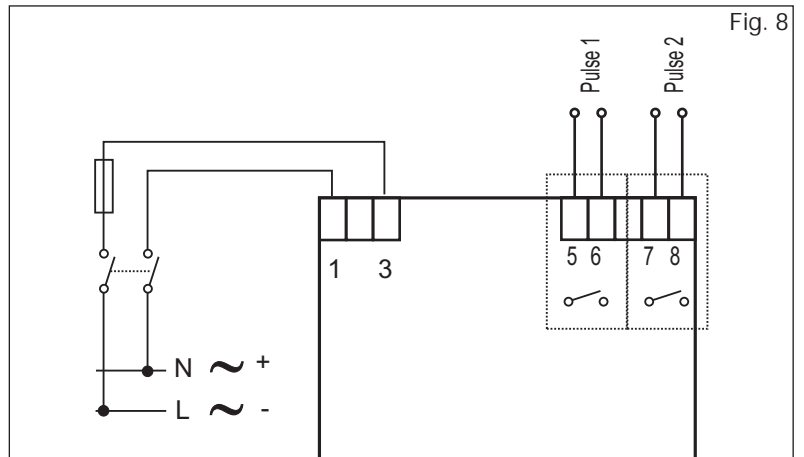

Front Panel Description

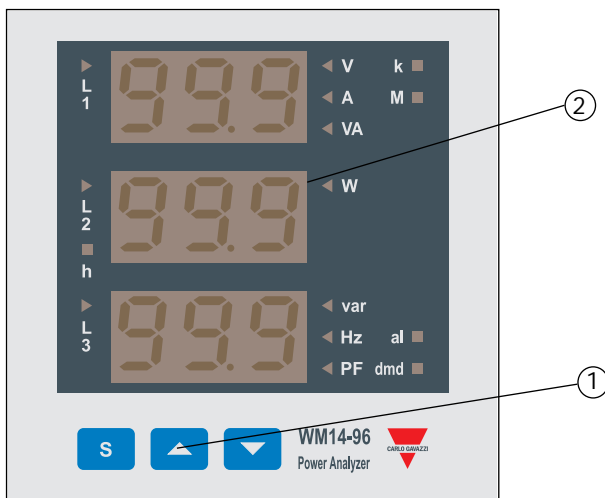

1. Key-pad

To program the configuration parameters and the display of the variables.

S

Key to enter programming and confirm selections;



Keys to:

- programme values;
- select functions;
- display measuring pages.

2. Display

LED-type with alphanumeric indications to:

- display configuration parameters;
- display all the measured variables.

Dimensions and Panel Cut-out

